

Fräserschaft, Weldon (vgl. DIN 1835 B)

Stahl-Ausführung mit innerer Kühlmittelzufuhr und Aufnahme nach DIN 1835 B.

Milling Cutter Shank, Weldon (DIN 1835 B)

Steel type with through coolant and shank according to DIN 1835 B.

Anzugsmoment (Schraube) // Tightening torque (screw)

4,5 Nm

Vergleichbare Werkzeuge auf Seite // Similar tools on page
476

Bitte Hinweise im Anhang beachten // Please read add. notes

ALL (Seite/Page 645)




Legende
 Legend **650**



Scan
 QR-Code

Oder besuchen Sie // Or Visit
www.simtek.info/cp/422

Whistle-Notch Aufnahme auf Anfrage erhältlich.
 Whistle-Notch fixation available upon request.

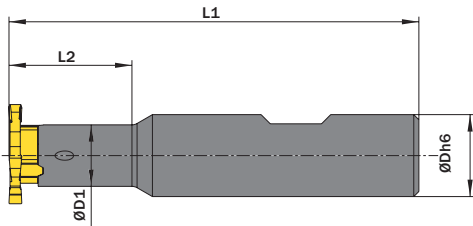

ØDh6	ØD1	L2	Artikelnummer Part number	Webcode www.simtek.com/webcode	L1	Schraube Screw	Schraubenschlüssel Screw driver	Connectcode www.simtek.com/code
mm	mm	mm			mm			
▼ ØDh6 = 12,0 mm								
12,0	9,0	18,0	U18.1209.18 B ST	AV6E	80,0	U M4x12 T15F	T15F	UD09.0
▼ ØDh6 = 15,875 mm								
15,875	9,0	18,0	U18.0.625.09.18 B ST	AFHD	80,0	U M4x12 T15F	T15F	UD09.0
▼ ØDh6 = 16,0 mm								
16,0	9,0	18,0	U18.1609.18 B ST	ABP7	80,0	U M4x12 T15F	T15F	UD09.0

Inch

Bestellbeispiel // Order example: **U18.1609.18 B ST**