

## Fräserschaft, Weldon (vgl. DIN 1835 B)

Stahl-Ausführung mit innerer Kühlmittelzufuhr und Aufnahme nach DIN 1835 B.

## Milling Cutter Shank, Weldon (DIN 1835 B)

Steel type with through coolant and shank according to DIN 1835 B.

Anzugsmoment (Schraube) // Tightening torque (screw)

**4,5 Nm**

Vergleichbare Werkzeuge auf Seite // Similar tools on page  
**476**

Bitte Hinweise im Anhang beachten // Please read add. notes

**ALL (Seite/Page 645)**




Legende  
 Legend **650**



Scan  
 QR-Code

Oder besuchen Sie // Or Visit  
[www.simtek.info/cp/422](http://www.simtek.info/cp/422)

Whistle-Notch Aufnahme auf Anfrage erhältlich.  
 Whistle-Notch fixation available upon request.

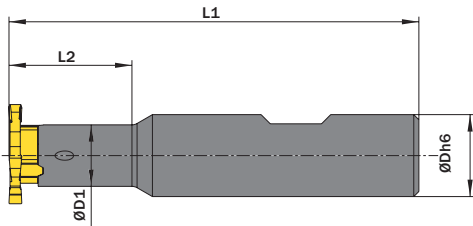

ØDh6	ØD1	L2	Artikelnummer Part number	Webcode <a href="http://www.simtek.com/webcode">www.simtek.com/webcode</a>	L1	Schraube Screw	Schraubenschlüssel Screw driver	Connectcode <a href="http://www.simtek.com/code">www.simtek.com/code</a>
mm	mm	mm			mm			
▼ ØDh6 = 12,0 mm								
12,0	9,0	18,0	<b>U18.1209.18 B ST</b>	AV6E	80,0	U M4x12 T15F	T15F	UD09.0
▼ ØDh6 = 15,875 mm								
15,875	9,0	18,0	<b>U18.0.625.09.18 B ST</b>	AFHD	80,0	U M4x12 T15F	T15F	UD09.0
▼ ØDh6 = 16,0 mm								
16,0	9,0	18,0	<b>U18.1609.18 B ST</b>	ABP7	80,0	U M4x12 T15F	T15F	UD09.0

inch

Bestellbeispiel // Order example: **U18.1609.18 B ST**