

Klemmhalter, Innenbearbeitung, Quadratschaft

Quadratischer Schaft für die Innenbearbeitung.

Toolholder, Internal Applications, Square Shank

Square shank for internal applications.

Anzugsmoment (Schraube) // Tightening torque (screw)

7,0 Nm

Bitte Hinweise im Anhang beachten // Please read add. notes

MASTER (Seite/Page 137)





TW Legende
ST Legend

139

Scan QR-Code

Oder besuchen Sie // Or Visit
www.simtek.info/cp/745

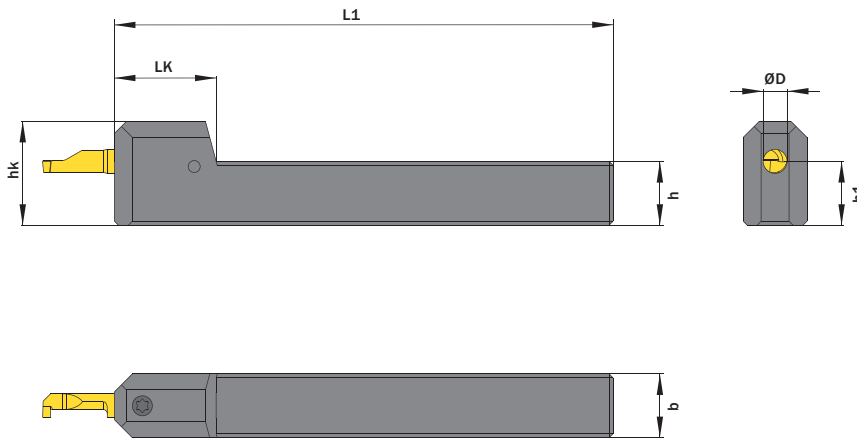

- Hauptsächlich geeignet für diese Flächen
Mainly designed for these surfaces
- Je nach Schneidplatte ebenfalls möglich
Also possible depending on insert type

Abbildung zeigt / Drawing shows: A06.1616

| ØD | h | b | Artikelnummer Part number | Webcode www.simtek.com/webcode | h1 | hk | L1 | LK | Schraube Screw | Schraubenschlüssel Screw driver | Connectcode www.simtek.com/code | |
|----------------------|--------|--------|------------------------------|-----------------------------------|-------|------|-------|------|-------------------|------------------------------------|------------------------------------|------|
| mm | mm | mm | | | mm | mm | mm | mm | | | | |
| ▼ ØD = 4,0 mm | | | | | | | | | | | | |
| 4,0 | 12,7 | 12,7 | A04.0.500.S | AJ10 | 12,7 | 22,0 | 100,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | inch |
| 4,0 | 15,875 | 15,875 | A04.0.625.S | ACQ9 | 15,88 | 25,0 | 125,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | inch |
| 4,0 | 19,05 | 19,05 | A04.0.750.S | AHP1 | 19,05 | 28,0 | 125,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | inch |
| 4,0 | 25,4 | 25,4 | A04.1.000.S | AT9S | 25,4 | 34,0 | 150,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | inch |
| 4,0 | 10,0 | 10,0 | A04.1010 | ACXN | 10,0 | 19,0 | 100,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | |
| 4,0 | 12,0 | 12,0 | A04.1212 | AF1Y | 12,0 | 21,0 | 100,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | |
| 4,0 | 16,0 | 16,0 | A04.1616 | AC69 | 16,0 | 25,0 | 125,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | |
| 4,0 | 20,0 | 20,0 | A04.2020 | AD4F | 20,0 | 29,0 | 125,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | |
| 4,0 | 25,0 | 25,0 | A04.2525 | ATZG | 25,0 | 34,0 | 150,0 | 19,0 | A M6x7,5 T15F | T15F | A04.L A04.R A04CL A04CR | |
| ▼ ØD = 5,0 mm | | | | | | | | | | | | |
| 5,0 | 12,7 | 12,7 | A05.0.500.S | AAPM | 12,7 | 22,5 | 100,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | inch |
| 5,0 | 15,875 | 15,875 | A05.0.625.S | ANNQ | 15,88 | 25,5 | 125,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | inch |
| 5,0 | 19,05 | 19,05 | A05.0.750.S | ANWK | 19,05 | 28,5 | 125,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | inch |
| 5,0 | 25,4 | 25,4 | A05.1.000.S | ATZP | 25,4 | 34,5 | 150,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | inch |
| 5,0 | 10,0 | 10,0 | A05.1010 | AMKZ | 10,0 | 19,5 | 100,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | |
| 5,0 | 12,0 | 12,0 | A05.1212 | ABNX | 12,0 | 21,5 | 100,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | |
| 5,0 | 16,0 | 16,0 | A05.1616 | AJYG | 16,0 | 25,5 | 125,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | |
| 5,0 | 20,0 | 20,0 | A05.2020 | AF6C | 20,0 | 29,5 | 125,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | |
| 5,0 | 25,0 | 25,0 | A05.2525 | ATZH | 25,0 | 34,5 | 150,0 | 25,0 | A M6x7,5 T15F | T15F | A05.L A05.R | |

Verwandte Werkzeuge finden Sie auch auf der folgenden Seite!
Related Items can be found on the following page as well!

Fortgesetzte Tabelle
Continued Table

Bestellbeispiel // Order example: **A05.2020**